


SHAPE AND DIMENSION

DIMENSION (UNIT:mm)

(2) PAD LAYOUT

(3) SCHEMATIC

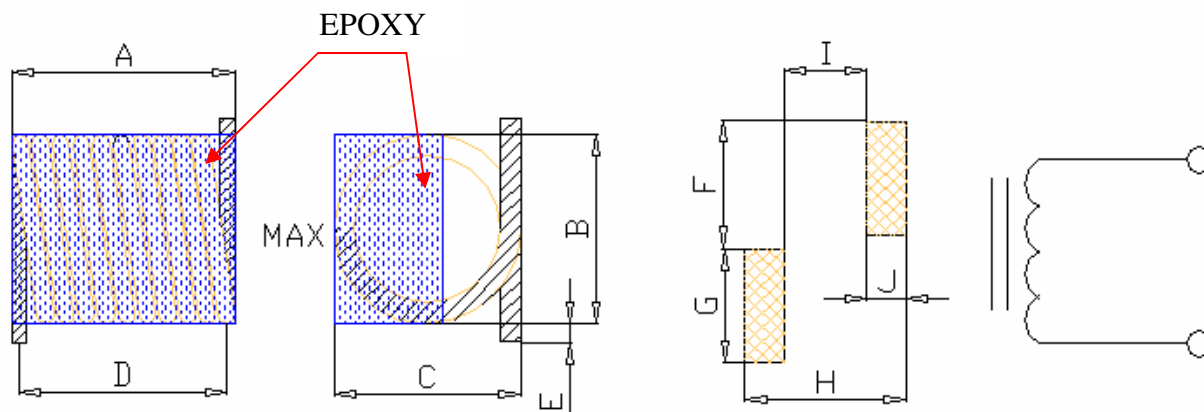

NOTE: COPPER WIRE 'S COLOR OF **Gold/Red**

TYPE	A	B	C	D	E	F	G	H	I	J
CR2215	2.20±0.3	1.40±0.2	1.40±0.2	1.80±0.3	0.90±0.3	1.0	2.5	2.6	1.0	0.8
CR4015	4.00±0.3	1.40±0.2	1.40±0.2	3.50±0.3	0.90±0.3	1.0	2.5	4.5	2.9	0.8

SPECIFICATIONS

NO	PART NO.	INDUCTANC E (nH)	TEST CONDITION	Q MIN	SRF(MIN) GHz	REMARK
1	CR2215-02	1.65±10%	800MHz	100.0	>3.0	
2	CR2215-03	2.55±10%	800MHz	100.0	>3.0	
3	CR2215-04	3.85±10%	800MHz	100.0	>3.0	
4	CR2215-05	5.45±5%	800MHz	100.0	>3.0	
5	CR4015-06	5.60±5%	800MHz	100.0	>3.0	
6	CR4015-07	7.15±5%	800MHz	100.0	>3.0	
7	CR4015-08	8.80±5%	800MHz	100.0	>3.0	
8	CR4015-09	9.85±5%	800MHz	100.0	>3.0	
9	CR4015-10	12.55±5%	800MHz	100.0	>3.0	

Test equipments: HP4286A / HP16191A