




SMT COMMON MODE FILTER

SPECIFICATIONS

ITEM	IMPEDANCE		Insertion Loss(dB)MAX				DCR	IDC
	100MHZ	200MHZ	50MHZ	100MHZ	300MHZ	500MHZ	OHM(MAX)	A(MAX)
CR8P-LA	70MIN	105MIN	4.6	8.3	11.5	12.3	0.1	0.65
CR8P-LB	180MIN	250MIN	9.5	11.0	16.5	14.5	0.1	0.65
CR8P-LC	365MIN	335MIN	11.0	18.5	17.5	12.8	0.1	0.65
CR8P-SA	105MIN	160MIN	6.5	10.5	14.0	14.5	0.3	0.50
CR8P-SB	200MIN	280MIN	10.0	15.0	17.8	15.5	0.3	0.50

INSERTION LOSS & IMPEDANCE

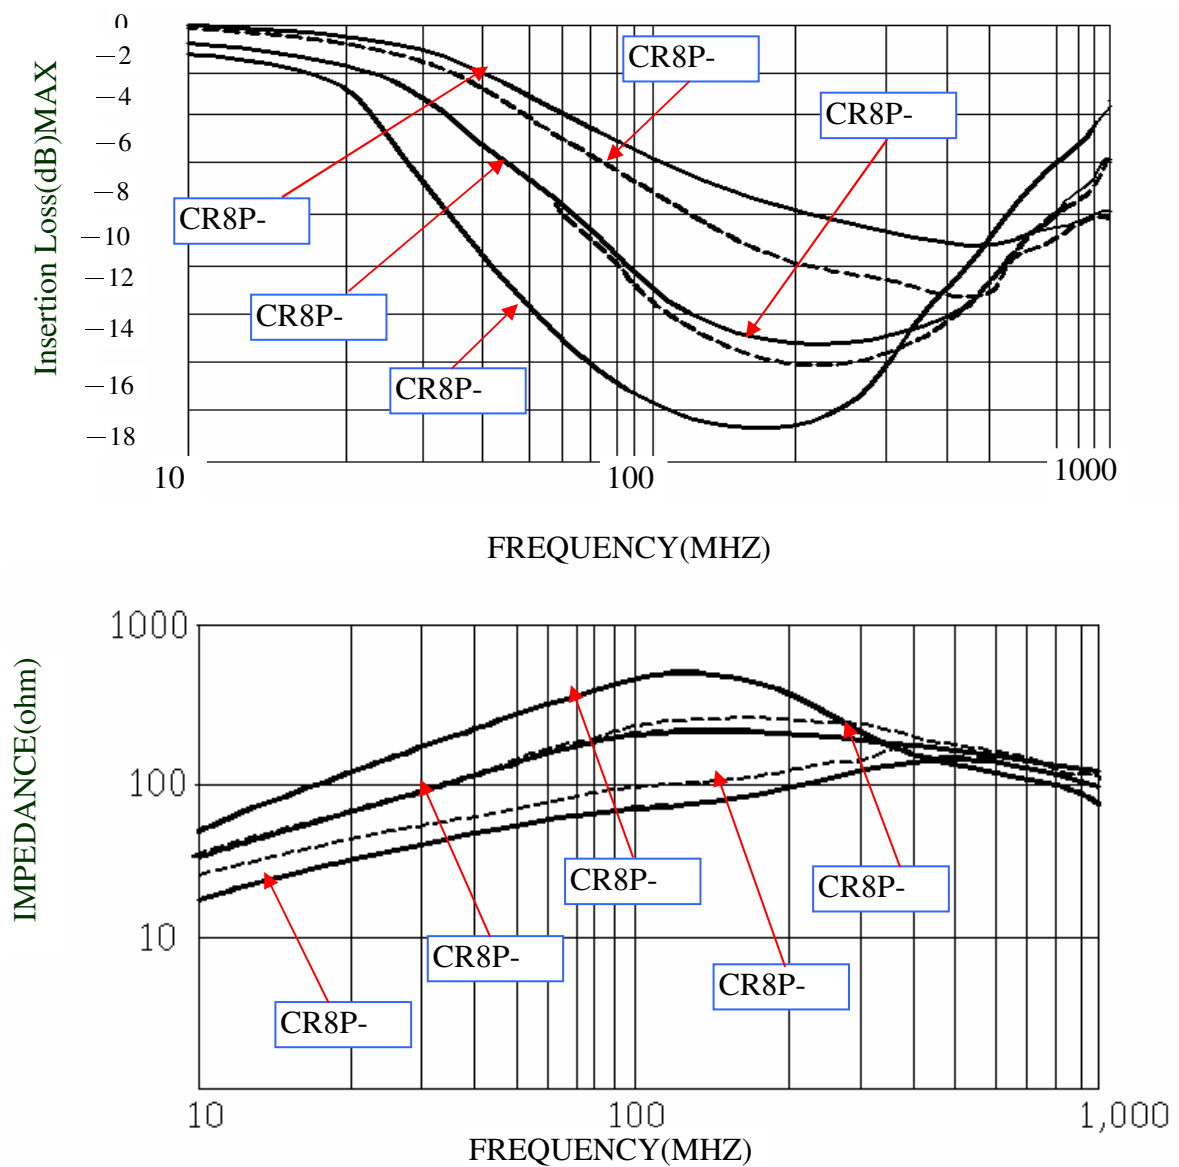

CLIDER ENTERPRISE CO.,LTD
可立德實業有限公司