



1.SHAPE AND DIMENSIONS(UNIT:mm)

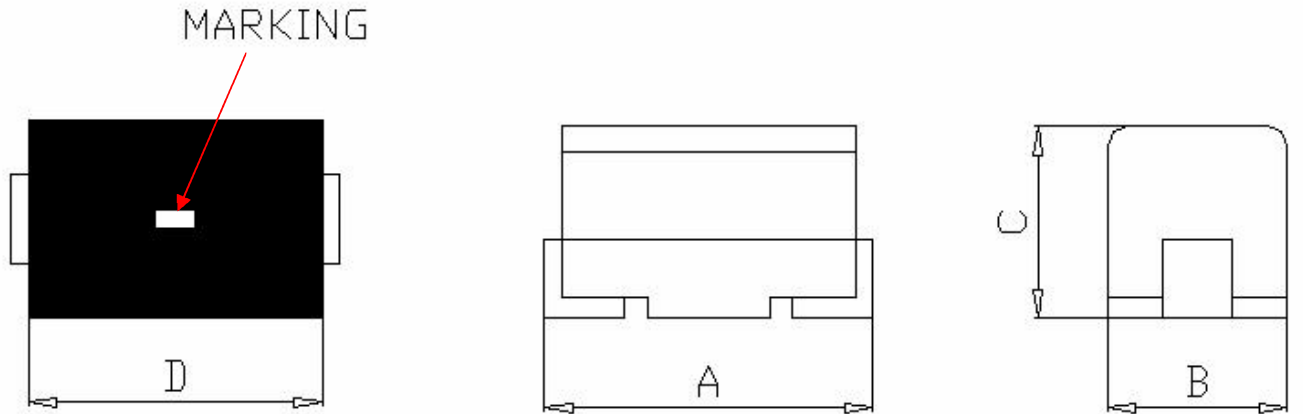

PART NO.	A	B	C	D
CRW-252018	2.50±0.2	2.00±0.2	1.80±0.2	2.20±0.2
CRW-322522	3.20±0.3	2.50±0.2	2.20±0.2	2.90±0.2
CRW-453232	4.50±0.3	3.20±0.2	3.20±0.2	4.20±0.2

2.PAD LAYOUT

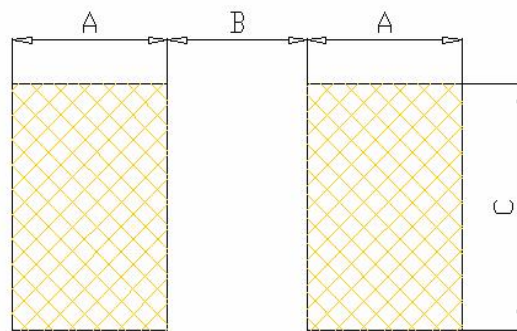

TYPE	A	B	C
CRW-322522	1.00	1.80	2.00
CRW-453232	1.50	2.50	2.50



SMD WOUND CHIP INDUCTOR

1.SPECIFICATIONS(CRW252018 SERIES)

PART NO.	L	TEST FREQ.	Q	SRF(MHZ)	RDC(ohm)	IDC(MA)
	Uh	MHZ	MIN	MIN	MAX	MAX
CRW252018-R22	0.22	25.2	25	230	0.70	190
CRW252018-R27	0.27	25.2	25	210	0.75	180
CRW252018-R33	0.33	25.2	25	190	0.85	170
CRW252018-R39	0.39	25.2	25	175	0.95	160
CRW252018-R47	0.47	25.2	25	160	1.00	155
CRW252018-R56	0.56	25.2	25	150	1.10	150
CRW252018-R68	0.68	25.2	25	135	1.25	140
CRW252018-R82	0.82	25.2	25	125	1.4	130
CRW252018-1R0	1.00	7.96	25	115	0.65	195
CRW252018-1R2	1.20	7.96	25	100	0.75	180
CRW252018-1R5	1.50	7.96	25	90	0.85	170
CRW252018-1R8	1.80	7.96	25	85	0.95	160
CRW252018-2R2	2.20	7.96	25	80	1.05	155
CRW252018-2R7	2.70	7.96	25	75	1.20	145
CRW252018-3R3	3.30	7.96	25	65	1.30	135
CRW252018-3R9	3.90	7.96	25	60	1.40	130
CRW252018-4R7	4.70	7.96	25	55	1.55	125
CRW252018-5R6	5.60	7.96	25	50	1.75	120
CRW252018-6R8	6.80	7.96	25	45	1.95	115
CRW252018-8R2	8.20	7.96	25	40	2.20	105
CRW252018-100	10.00	2.52	25	32	3.50	80
CRW252018-120	12.00	7.96	25	30	3.80	75
CRW252018-150	15.00	2.52	25	28	4.40	70
CRW252018-180	18.00	2.52	25	25	5.00	65
CRW252018-220	22.00	2.52	25	22	5.80	60
CRW252018-270	27.00	2.52	20	21	6.30	115
CRW252018-330	33.00	2.52	20	20	7.10	110
CRW252018-390	39.00	2.52	20	18	9.50	90
CRW252018-470	47.00	2.52	20	17	11.00	80
CRW252018-560	56.00	2.52	20	16	12.10	75
CRW252018-680	68.00	2.52	20	15	16.60	70
CRW252018-820	82.00	2.52	20	13	19.00	65
CRW252018-101	100.00	0.796	15	12	21.00	60

CLIDER ENTERPRISE CO.,LTD



SMD WOUND CHIP INDUCTOR

1.SPECIFICATIONS(CRW322522 SERIES)

PART NO.	L	TEST FREQ.	Q	SRF(MHZ)	RDC(ohm)	IDC(MA)
	Uh	MHZ	MIN	MIN	MAX	MAX
CRW322522-R10	0.10	100	28	700	0.44	450
CRW322522-R12	0.12	25.2	30	500	0.22	450
CRW322522-R15	0.15	25.2	30	450	0.25	450
CRW322522-R18	0.18	25.2	30	400	0.28	450
CRW322522-R22	0.22	25.2	30	350	0.32	450
CRW322522-R27	0.27	25.2	30	320	0.36	450
CRW322522-R33	0.33	25.2	30	300	0.40	450
CRW322522-R39	0.39	25.2	30	250	0.45	450
CRW322522-R47	0.47	25.2	30	220	0.50	450
CRW322522-R56	0.56	25.2	30	180	0.55	450
CRW322522-R68	0.68	25.2	30	160	0.60	450
CRW322522-R82	0.82	25.2	30	140	0.65	450
CRW322522-1R0	1.00	7.96	30	120	0.70	400
CRW322522-1R2	1.20	7.96	30	100	0.75	390
CRW322522-1R5	1.50	7.96	30	85	0.85	370
CRW322522-1R8	1.80	7.96	30	80	0.90	350
CRW322522-2R2	2.20	7.96	30	75	1.00	320
CRW322522-2R7	2.70	7.96	30	70	1.10	290
CRW322522-3R3	3.30	7.96	30	60	1.20	260
CRW322522-3R9	3.90	7.96	30	55	1.30	250
CRW322522-4R7	4.70	7.96	30	50	1.50	220
CRW322522-5R6	5.60	7.96	30	47	1.60	200
CRW322522-6R8	6.80	7.96	30	43	1.80	180
CRW322522-8R2	8.20	7.96	30	40	2.00	170
CRW322522-100	10.00	2.52	30	36	2.10	150
CRW322522-120	12.00	2.52	30	33	2.50	140
CRW322522-150	15.00	2.52	30	28	2.80	130
CRW322522-180	18.00	2.52	30	25	3.30	120
CRW322522-220	22.00	2.52	30	23	3.70	110
CRW322522-270	27.00	2.52	30	18	5.00	80
CRW322522-330	33.00	2.52	30	17	5.60	70
CRW322522-390	39.00	2.52	30	16	6.40	65
CRW322522-470	47.00	2.52	30	15	7.00	60
CRW322522-560	56.00	2.52	30	13	8.00	55
CRW322522-680	68.00	2.52	30	12	9.00	50
CRW322522-820	82.00	2.52	30	11	10.00	45
CRW322522-101	100.00	0.796	20	10	11.2	40
CRW322522-121	120.00	0.796	20	10	12.00	70
CRW322522-151	150.00	0.796	20	8	15.00	65
CRW322522-181	180.00	0.796	20	7	17.00	60
CRW322522-221	220.00	0.796	20	7	21.00	50

CLIDER ENTERPRISE CO.,LTD



1.SPECIFICATIONS(CRW453232 SERIES)

PART NO.	L	TEST FREQ.	Q	SRF(MHZ)	RDC(ohm)	IDC(MA)
	Uh	MHZ	MIN	MIN	MAX	MAX
CRW453232-R10	0.10	25.2	28	700	0.44	450
CRW453232-R12	0.12	25.2	30	500	0.22	450
CRW453232-R15	0.15	25.2	30	450	0.25	450
CRW453232-R18	0.18	25.2	30	400	0.28	450
CRW453232-R22	0.22	25.2	30	350	0.32	450
CRW453232-R27	0.27	25.2	30	320	0.36	450
CRW453232-R33	0.33	25.2	30	300	0.40	450
CRW453232-R39	0.39	25.2	30	250	0.45	450
CRW453232-R47	0.47	25.2	30	220	0.50	450
CRW453232-R56	0.56	25.2	30	180	0.55	450
CRW453232-R68	0.68	25.2	30	160	0.60	450
CRW453232-R82	0.82	25.2	30	140	0.67	450
CRW453232-1R0	1.00	7.96	50	100	0.50	450
CRW453232-1R2	1.20	7.96	50	80	0.55	430
CRW453232-1R5	1.50	7.96	50	70	0.60	410
CRW453232-1R8	1.80	7.96	50	60	0.65	390
CRW453232-2R2	2.20	7.96	50	55	0.70	380
CRW453232-2R7	2.70	7.96	50	50	0.75	370
CRW453232-3R3	3.30	7.96	50	45	0.80	355
CRW453232-3R9	3.90	7.96	50	40	0.90	330
CRW453232-4R7	4.70	7.96	50	35	1.00	315
CRW453232-5R6	5.60	7.96	50	33	1.10	300
CRW453232-6R8	6.80	7.96	50	27	1.20	285
CRW453232-8R2	8.20	7.96	50	25	1.40	270
CRW453232-100	10.00	2.52	50	20	1.60	250
CRW453232-120	12.00	2.52	50	18	2.00	225
CRW453232-150	15.00	2.52	50	17	2.50	200
CRW453232-180	18.00	2.52	50	15	2.80	190
CRW453232-220	22.00	2.52	50	13	3.20	180
CRW453232-270	27.00	2.52	50	12	3.60	170
CRW453232-330	33.00	2.52	50	11	4.00	160
CRW453232-390	39.00	2.52	50	10	4.50	150
CRW453232-470	47.00	2.52	50	10	5.00	140
CRW453232-560	56.00	2.52	50	9	5.50	135
CRW453232-680	68.00	2.52	50	9	6.00	130
CRW453232-820	82.00	2.52	50	8	7.00	120
CRW453232-101	100.00	0.796	40	7	8.00	110
CRW453232-121	120.00	0.796	40	6	8.00	110
CRW453232-151	150.00	0.796	40	5	9.00	105
CRW453232-181	180.00	0.796	40	5	9.50	102
CRW453232-221	220.00	0.796	40	4	12.00	100



SMD WOUND CHIP INDUCTOR

1. SPECIFICATIONS (CRW453232 SERIES)

PART NO.	L	TEST FREQ.	Q	SRF(MHZ)	RDC(ohm)	IDC(MA)
	Uh	MHZ	MIN	MIN	MAX	MAX
CRW453232-271	270.00	0.796	30	3	18.00	92
CRW453232-331	330.00	0.796	30	3	20.00	85
CRW453232-391	390.00	0.796	30	3	23.00	80
CRW453232-471	470.00	0.796	30	3	26.00	62
CRW453232-561	560.00	0.796	30	2	30.00	50
CRW453232-681	680.00	0.796	30	2	40.00	50
CRW453232-821	820.00	0.796	30	2	45.00	30
CRW453232-102	1000.00	0.796	30	2	50.00	30

◆ TOLERANCE: J=±5% K=±10% M=±20%